



Unmatched Quality Tiles

# BRICKS

12" x 24"

300mm x 600mm





Unmatched Quality Tiles





# “Stile Bricks Collection

Encapsulating the class & charm of an authentic brick wall, Stile Bricks can easily replicate the rustic appeal indoors or outdoors of your house. With a traditional yet contemporary allure, you can find brick effects ranging from mud browns to magnificent greys, buff bricks to dull reds.

Adding a subtle warmth and character to the space, you can make a feature wall by installing these tiles on one of the walls and creating a focal point in the room. Even better, you can find the perfect brick tile to match a pre-existing standard brick wall or create a cosy breakfast nook with the retro look of a brick facade. ”





Unmatched Quality Tiles

## Why Stile Bricks?

These tiles are sure to enhance the decorative elements of your space. With Stile Bricks, you can maintain the appearance of traditional bricks and combine it with the ease and durability of tiles. Artistically pleasing, budget friendly and easy to install – choosing these tiles is a distinctively great idea for your home that can uplift the overall theme of your home.

**Size: 12x24 inches, 30x60 cm, 300x600 mm**



# Benefits Of Using Stile Bricks Collection



Due to the glazed coating on Stile Ceramic tiles, they are resistant to stains and fading.



Due to their finish, Stile Ceramic tiles are hygienic, easily wipe clean and low maintenance.



The design can suit your specific taste and can be accommodated in any theme.



They are resistant to household chemicals and can be easily cleaned by means of hot water.



The installation of these tiles is ideal, easy, and hassle-free.



Tile is double fired in kiln for hardening, hence, if installed correctly, these tiles can ensure durability for decades.

## Die Punch Wall Tiles:

Tile pressed from die punch have some specific punch design or texture on upper surface of tile.

## Inkjet Wall Tiles:

Inkjet Tiles go through the process of printing digital-based images directly onto the tile.

## Glazed Matt or Glazed Glossy Ceramic:

A thin coat of liquefied glass with a layer of matt coat or glossy glaze is applied over the top surface of ceramic tile.

## Stile Recommends:

Using them on interior and exterior walls. They are well-suited for domestic bathroom walls & can also be installed on bathroom flooring. They can be used as a design element in bedroom, living room and drawing room. Also, we recommend using these on the backsplash areas of your modern, transitional or traditional kitchen.

Additionally, in commercial wall spaces such as offices and restaurants, these could be used for backsplashes in kitchens, coffee corners and bathrooms to add a modern & elegant look. Use these tiles to maintain hygiene while adding a traditional look to enhance the beauty of your living spaces. These can also be used in other spaces creatively to enhance the overall design theme.

## Note:

Use these tiles with Stile Porcelain tiles.

For best results, use Stile Bond and Stile Grout.










**BRICKS – RED CLAY**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM







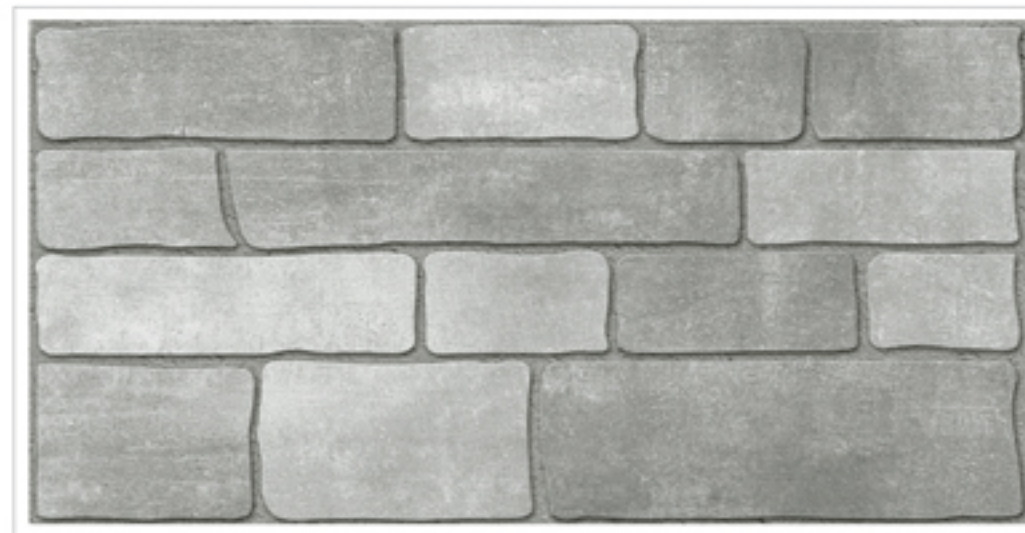


**BRICKS – CONCRETE**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM







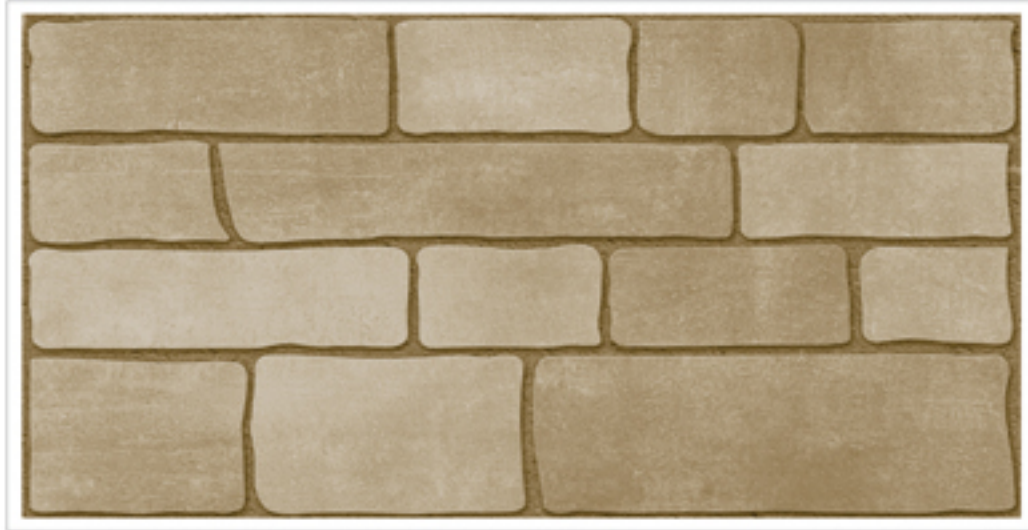

**BRICKS – MUD CLAY**

**DIE PUNCH, SURFACE FINISH I MATT**

12X24 INCHES, 30X60 CM



**BRICKS – RED CLAY**

**DIE PUNCH, SURFACE FINISH I MATT**

12X24 INCHES, 30X60 CM

**FLOOR VISUAL INCLUDES:**



**ELT-XX-F-15-B  
STONEAGE-TRAVERTINE  
SURFACE FINISH I MATT**

RANDOM, 24X48 INCHES, 60X120 CM









**BRICKS – STONES**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM

**FLOOR VISUAL INCLUDES:**



**WP-019 | DARK BROWN**  
**SURFACE FINISH I MATT**  
RANDOM, 6X37 INCHES, 14X92.5 CM









**BRICKS – ASPHALT**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM









**BRICKS – ROCK**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM









**BRICKS – MOON WHITE**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM



**BRICKS – MUD CLAY**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM









**BRICKS – SAND**  
**DIE PUNCH, SURFACE FINISH I MATT**  
12X24 INCHES, 30X60 CM



# DESIGN

*W* Guide





Unmatched Quality Tiles

**BRICKS – STONES**  
**DIE PUNCH | SURFACE FINISH | MATT**  
**12X24 INCHES, 30X60 CM**





**BRICKS – MUD CLAY**

**DIE PUNCH | SURFACE FINISH | MATT**

**12X24 INCHES, 30X60 CM**





Unmatched Quality Tiles



**BRICKS – RED CLAY**

**DIE PUNCH | SURFACE FINISH | MATT**

**12X24 INCHES, 30X60 CM**





**BRICKS – CONCRETE**

**DIE PUNCH | SURFACE FINISH | MATT**

**12X24 INCHES, 30X60 CM**





Unmatched Quality Tiles



**BRICKS – RED CLAY**

**DIE PUNCH | SURFACE FINISH | MATT**

**12X24 INCHES, 30X60 CM**





Unmatched Quality Tiles



**BRICKS – ASPHALT**














**DIE PUNCH | SURFACE FINISH | MATT**

**12X24 INCHES, 30X60 CM**



# TECHNICAL CHARACTERISTICS

## Wall - Ceramic Tiles, ISO 13006 Group BIII - Double Firing- Non-Rectified Tiles

S. No.		Technical Characteristics	Test Standard	Permissible Tolerance as per ISO norms	Stile Value
<b>DIMENSION AND SURFACE QUALITY</b>					
1		Dimension (Deviation in percentage from work size length and width)	ISO 10545-2	± 0.6 %	± 0.3 %
2		Thickness (Deviation in Percentage)	ISO 10545-2	± 10 %	± 3 %
3		Straightness of Sides (Maximum Deviation Percentage)	ISO 10545-2	± 0.3 %	± 0.2 %
4		Rectangularity (Maximum Deviation Percentage)	ISO 10545-2	± 0.5 %	± 0.4 %
5		Surface Flatness	ISO 10545-2	+0.5 / -0.3 %	+0.5 / -0.3 %
6		Surface Quality	ISO 10545-2	95% of tiles should be free from visible defects	Complied
<b>PHYSICAL PROPERTIES</b>					
7		Water Absorption %	ISO 10545-3	Greater than 10 %	14 % < E ≤ 16 %
8		Modulus of Rupture	ISO 10545-4	Avg. of 7 Tiles 15 N/mm <sup>2</sup>	Avg. of 7 Tiles 15 N/mm <sup>2</sup>
9		Breaking Strength	ISO 10545-4	> 600 N	> 700 N
10		Thermal Shock Resistance	ISO 10545-9	Required	Resistant
11		Crazing Resistance	ISO 10545-11	No Crazing	No Crazing
<b>CHEMICAL PROPERTIES</b>					
12		Resistance to Household Chemical*	ISO 10545-13	Min. Class-B	Class-A
13		Resistance to Staining**	ISO 10545-14	Min. Class-3	Class-5

**Note:**

\*Household Chemicals: Ammonium Chloride, Sodium Hypochlorite, Hydrochloric acid, Citric acid, Lactic acid, Potassium Hydroxide

\*\*Household Stains: Green Stain in light oil, Iodine Alcoholic solution, Olive oil

It is recommended that several cartons be opened and their contents checked and assembled to see the ideal color combination.

Please inspect all tiles prior to installation, company will not entertain complaints once tiles are laid/fixd.

**Disclaimer:**

*These images are merely a representation of the actual product. We do not guarantee an exact colour match of the image to the actual product. There may be a difference in colour, shade and tone of the image with the actual product.*



# Available throughout Pakistan at Stile Emporium & Design Studios and our Retailerships



Click here for  
Website



Click here for  
Stile ToolBook



Click here for  
Catalogs



Click here for  
Stile Tile Visualiser



Click here for  
Stile Tile Calculator



Click here for  
Instagram



Click here for  
Tile Installation  
Instructions



Click here for  
Store Locations

## STILE EMPORIUM

• Design Studio • Wall & Floor Tiles • Building Materials

• Karachi • Hyderabad • Sukkur • Rahim Yar Khan • Bahawalpur • D.G. Khan • Multan  
• Faisalabad • Lahore • Gujranwala • Rawalpindi • Islamabad • Wah Cantt • Peshawar • Gilgit

© +92-311-11STILE [78453] 🌐 www.stile.com.pk ✉ info@stile.com.pk  
📷 /stiletiles ceramic 📱 /ShabbirStile 🖨 tiledesigner.stile.com.pk

Copyright © 2024 Shabbir Tiles and Ceramics Limited